




Drawer-Bin Installation Guide

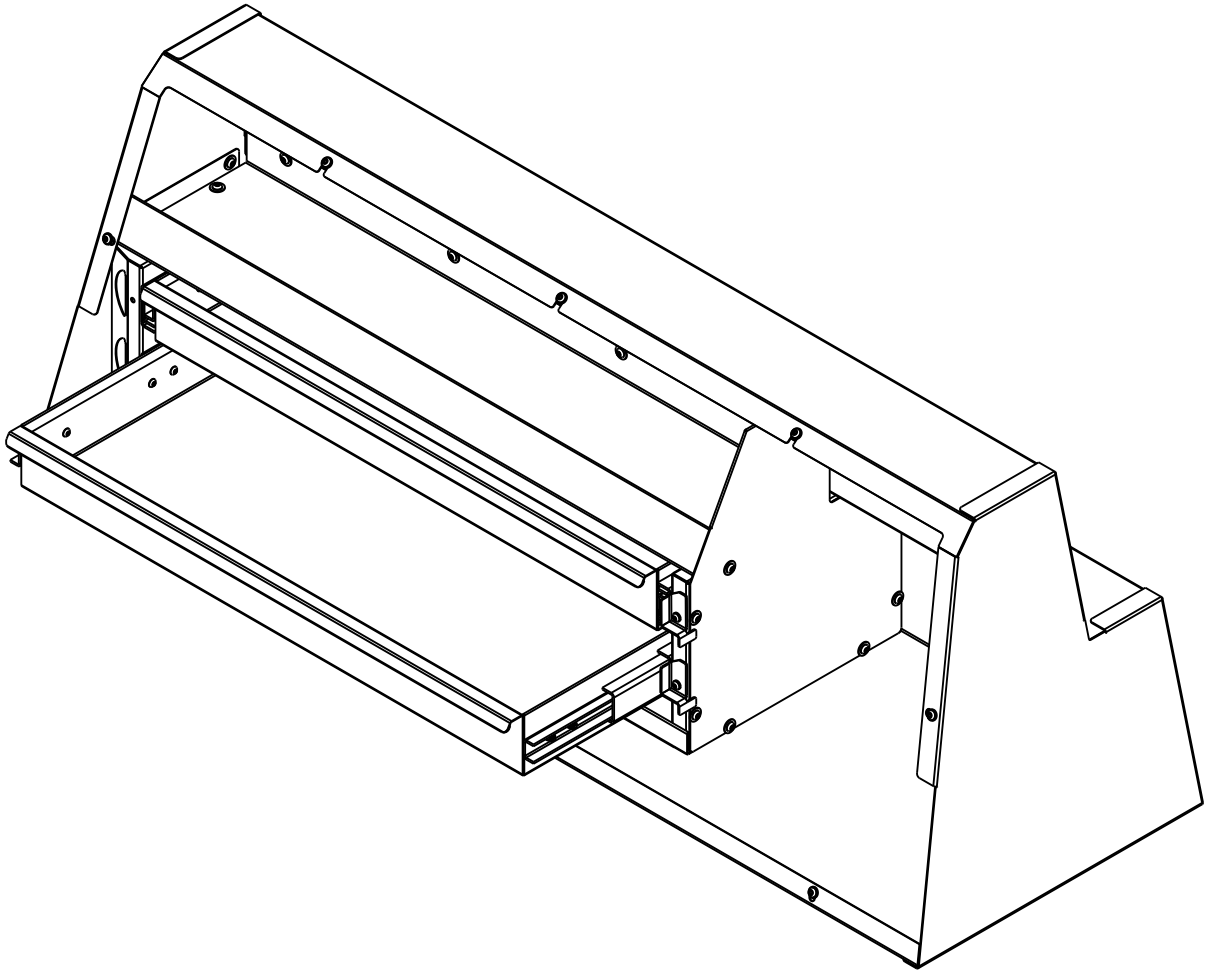

FOLLOW INSTRUCTIONS CAREFULLY TO AVOID ANY DAMAGE TO YOUR SMARTCAP PRODUCT OR YOUR VEHICLE

IF YOU HAVE QUESTIONS OR CONCERNS, PLEASE DO NOT HESITATE TO CONTACT US AT:

SUPPORT.NA@RSISMARTCAP.COM - NORTH AMERICA

SUPPORT.SA@SMARTCAP.COM - INTERNATIONAL/SOUTH AFRICA




ASSEMBLY KIT CONTENTS


KIT 1: ROOF PANEL FASTENING HARDWARE




8X M6
NYLOC NUTS



8X M6
FLAT WASHERS




8X M6X25
FENDER WASHERS




8X M6 X 12
BUTTON HEAD SCREW


REQUIRED TOOLS




Socket Wrench
10mm & 13mm Socket



Combination Wrench
10mm & 13mm Flat



Torque Wrench
10mm & 13mm Flat



4MM
ALLAN KEY SET


WARNING



- USE ONLY THE TOOLS RECOMMENDED IN THIS GUIDE
- USE ONLY THE HARDWARE THAT HAS BEEN PROVIDED
- HANDLE ALL COMPONENTS WITH CARE
- IT IS RECOMMENDED THAT FOUR PEOPLE LIFT/LOWER THE SMARTCAP
- NEVER USE ACETONE ON THE PAINTWORK
- AVOID PINCHING/SQUASHING HANDS

GULLWING BOX ORIENTATION:

FRONT

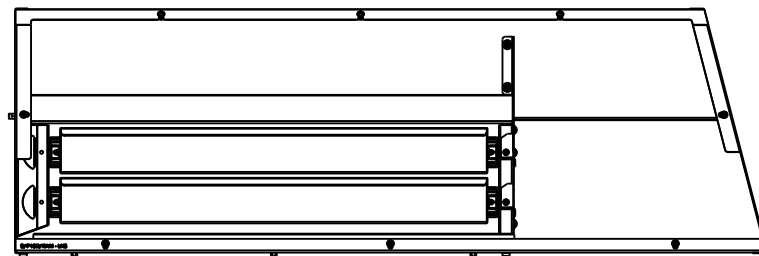


REAR


INSTALLATION OF THE SMARTDRAWER

STEP ONE

1. REMOVE PLASTIC WHITE CAPS FROM THE SIDE PANEL AND PROCEED WITH THE FOLLOWING...
2. HAND FASTEN THE HARDWARE ALONG THE TOP MOUNTING FACE ON THE SIDE PANEL. [SEE FIGURE 1]
3. LIFT THE RSI SMARTDRAWER UNIT AND HOOK INTO POSITION, A MINIMUM OF 2 PEOPLE ARE RECOMMENDED TO LIFT AND ALIGN THE SMARTDRAWER. [SEE FIGURE 2]

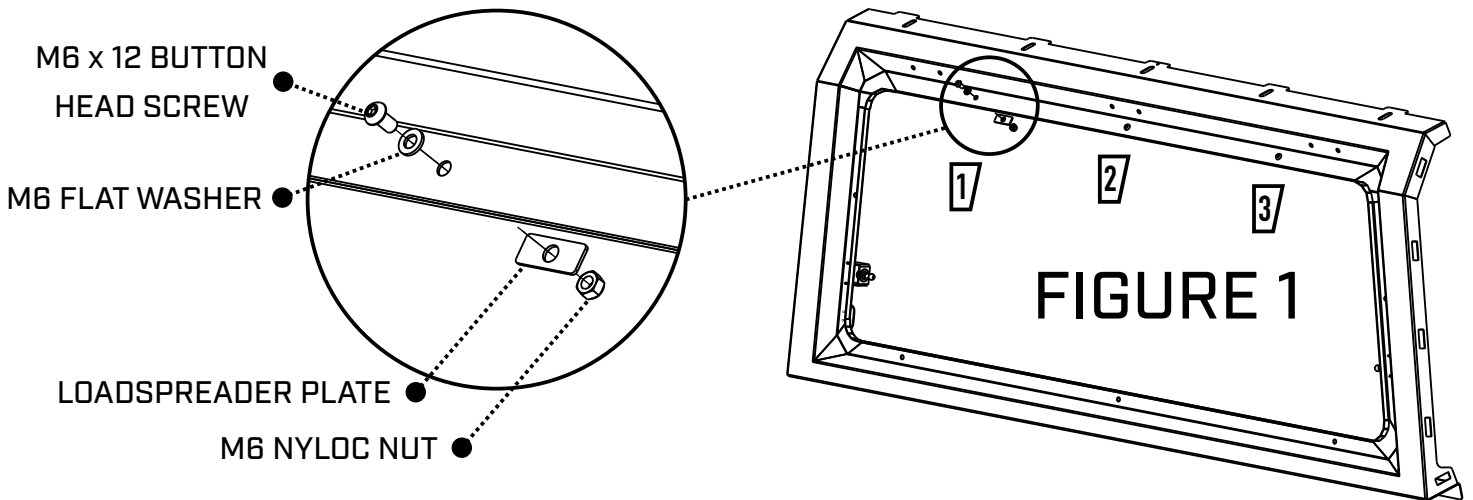

HOOK IN THE SMARTDRAWER UNIT
ALIGN SLOTS WITH MOUNTING
POSITIONS ON SIDE PANEL

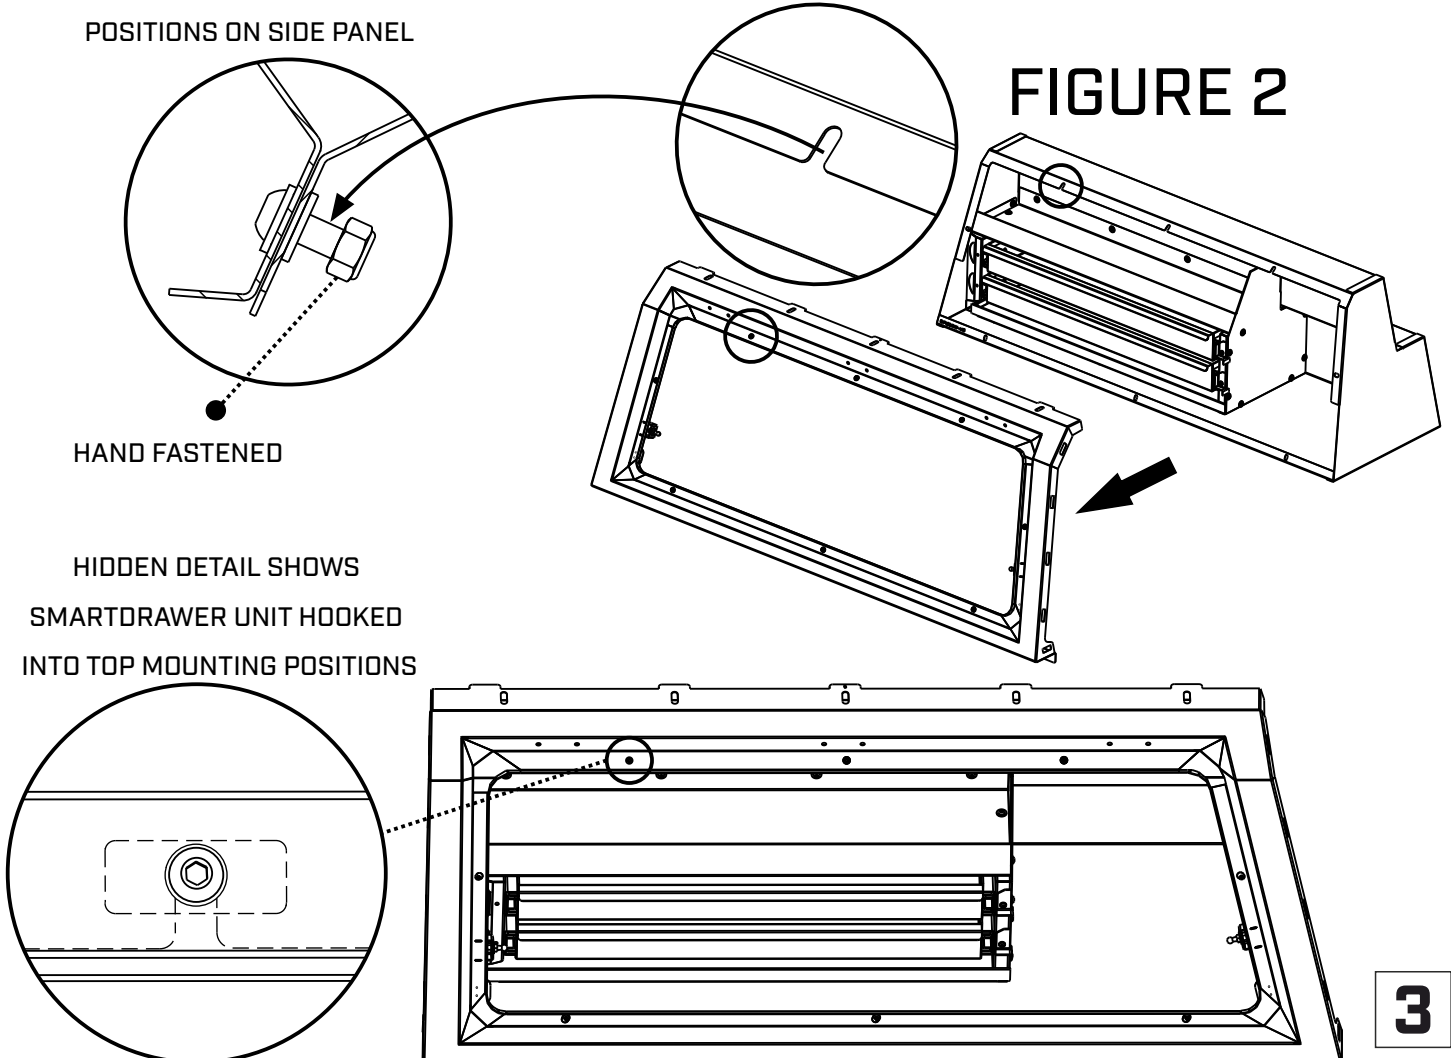

INSTALLATION OF THE SMARTDRAWER

STEP TWO

1. WHEN THE TOP IS SECURED FOLLOW THE SAME FASTENING METHOD SHOWN IN FIGURE 3 FOR THE REST OF THE MOUNTING POINTS.
2. ALIGN THE LOADSPREADER PLATES WITH SIDE PANEL EDGE. (SEE FIGURE 4)
3. FASTEN ALL FASTENERS TO 9FT-LB.

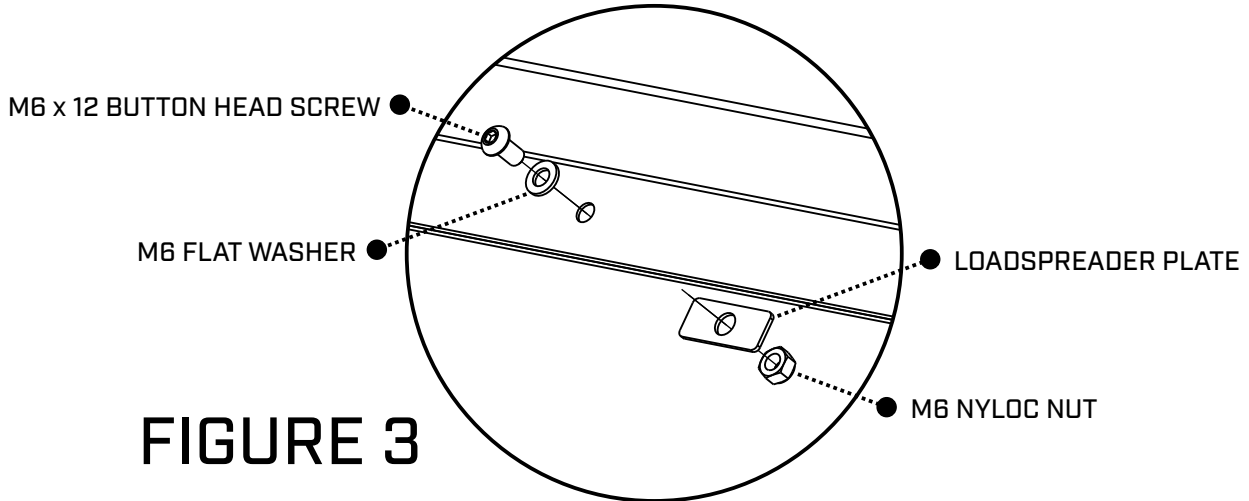


FIGURE 3

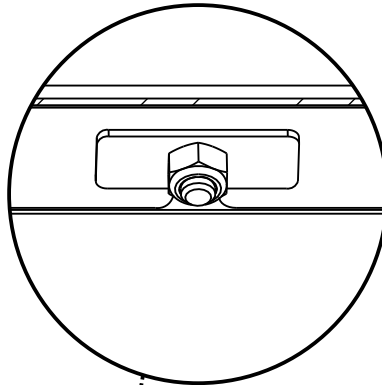


FIGURE 4

